


2025

Product
Catalogue

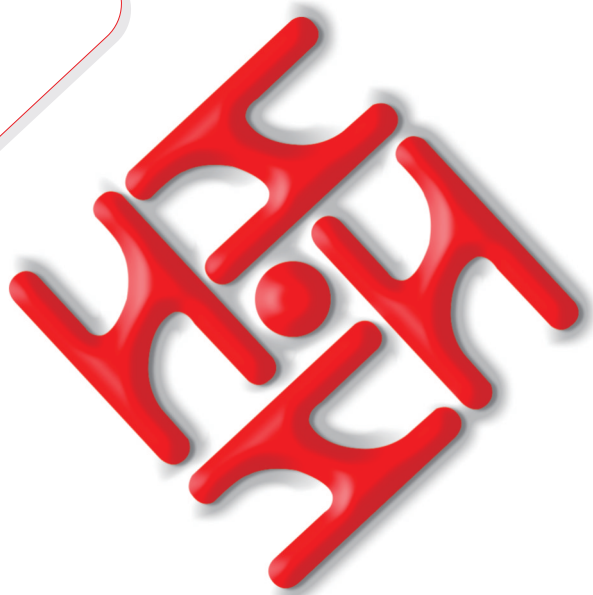

Shenzhen Huashenghua Technology Co., Ltd

Add: Bidg A, Belfang YongFa Industrial Park. ShaJing, ShenZhen

TEL: +86 19151817320

“

COMPANY INTRODUCTION

”



Shenzhen Huashenghua Technology Co., LTD.
Formerly of the industrial design firm
In the constant innovation lamps and lanterns design idea Learn Nature, the beauty of integration of nature, the pursuit of all things integration of the light of environmental art, lighting a pleasing light.
Thee natural light environment and the humanities art of light aesthetics into every indoor space, restore the real thing true self.
In the breakthrough of the existing production process, but also to continue the predecessor of Industrial Design Bloodline..
The lights up museums, red memorials, galleries, commercial spaces, and art spaces that embody the power of professionalism and value.
The products are not only satisfied with the basic needs of functionality, but also the pursuit of a man and nature, science and technology and poetic expression of aesthetic concepts.

Subtle, intelligent, illuminating the user's past and present
Durable, simple, but also let users see a brilliant future.



Business Layout

15

years
2010-20251800m²1800m² Production R & D workshop

160+

160 active employees

300+

Serving over 300 well-known brands



Winner of RED DOT, IDEA awards



62 invention patents

FACTORY STRENGTH


Automatic-Equipments



1800m²Of Assembly Workshops



R&D

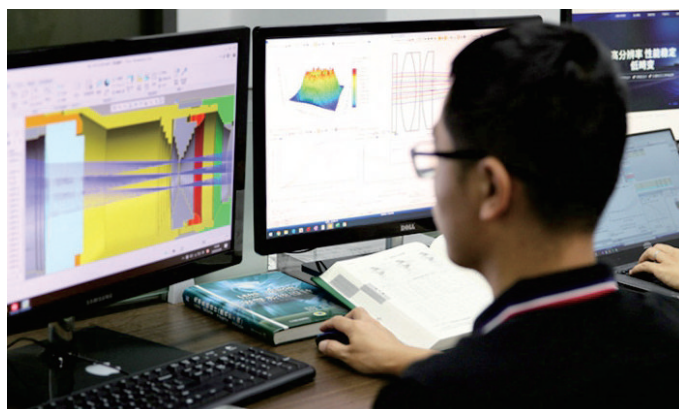

Hot-sales & Popular Items



P6-P8 HSD-KF85105/30W



P9-P11 HSD-XF Series/30W



P12-P13 HSD-T046 Series/30W



P14-P17 HSD-T085/30W



P18-P19 HSD-90T081/30W HSD-70T081/20W



P20-P21 HSD-切光二代 /30W




P22-P23 HSD-MEC-3 Series / 30W





P24 HSD-70Q50-2 / 15-20W

Customization of Private Mold Items

IP65 downlight / Ceiling Lights / COB strips .


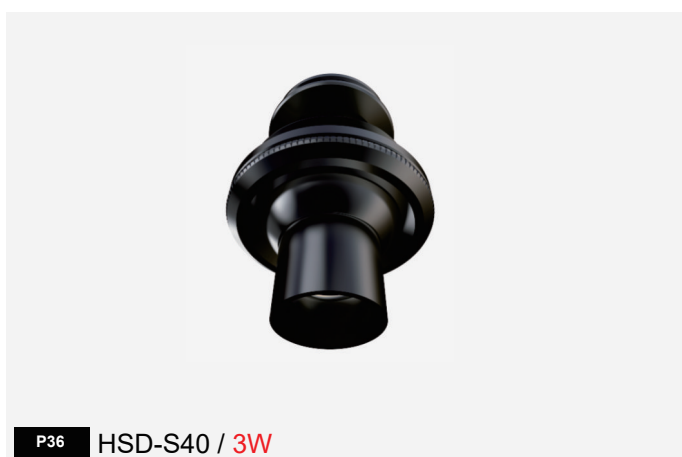


HSD-Door type lamp series



HSD-KF85105

New

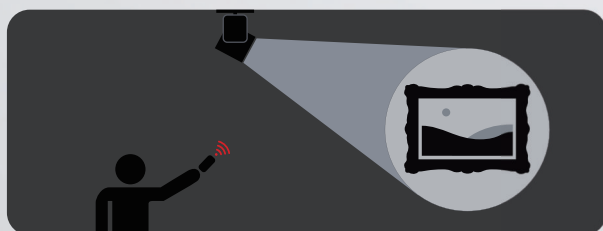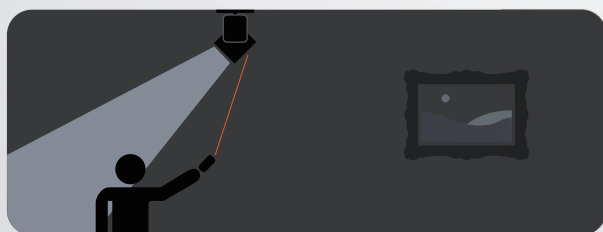

HSD-KF85105

New



IP20



Technical Date

CRI	Flux	Optic	Code
≥90 / ≥97	75-89 LM/W	15°-40°	HSD-KF85105

30W

2700K 3000K 4000K 5000K 5700K

AC200-240V50/60Hz

AAG / Eutrac 4 wires/6 wires

2.4G RF


CITIZEN / CREE / OSRAM

2.4G Control


Adapter on track Surface mounted

Warranty: 5 Years

Remote control

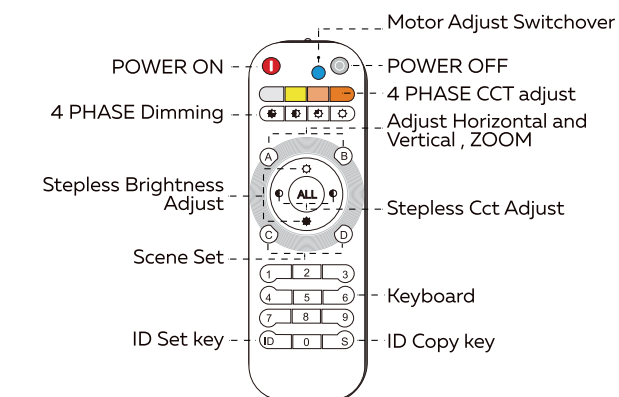

Application Scenario

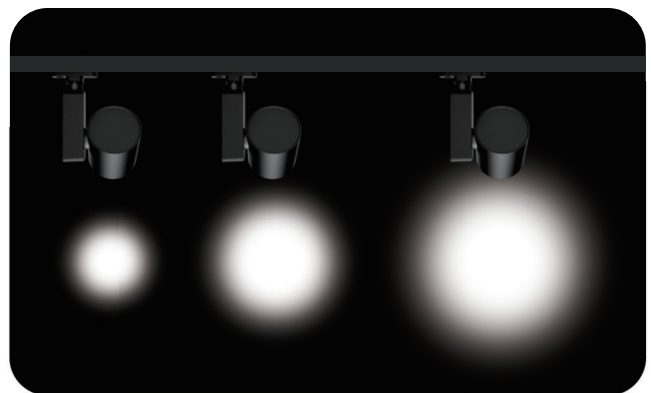

HSD-KF85105

New




Compact & Smooth Design

Electrical ZOOM Motor-driven

only one remote controller is needed to control all functions of the 99 groups lamps in the whole building under 30 meters distance



- ✓ Electrical Motor-driven CCT Adjustable
2700K 6500K
- ✓ Electrical Motor-driven Brightness Dimmable
0% 100%
- ✓ Electrical Motor-driven Direction Adjustable
350° 350°
- ✓ Electrical Motor-driven Zoomable
15°-40°
- ✓ Single Lamp Control , Or Group Lamps Control
- ✓ Scene Control
- ✓ One Remote Controller control 99 groups lamp
(lamps on each group are limitless)

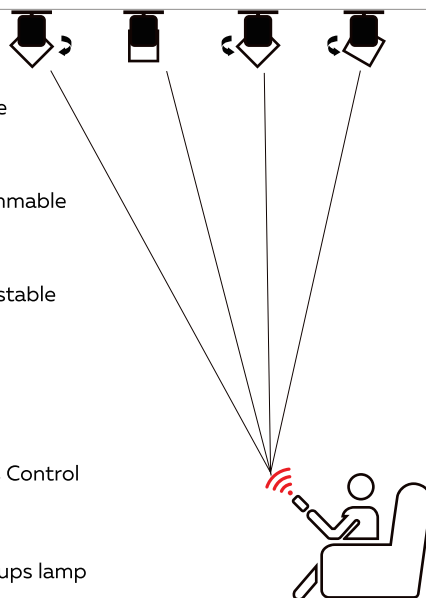

- ✗ CCT Adjustable , With Ladder
- ✗ Brightness Dimmable , With Ladder
- ✗ Angle Adjustable , With Ladder
- ✗ driven Zoomable , With Ladder



HSD-XF Series



HSD-XF Series



Optic Lens

10W / 20W / 30W

12°/15°/22°/24°/40°/60°

CRI: ≥90 / ≥95

2700K 3000K 4000K 5000K 5700K

100-120LM/W

4 wires / 6 wires

Standard/0-10V/Trica Dim/DALI /Tuya/
2.4G / CASAMBI

Warranty: 5 Years



DIMMABLE CCT

Reflector

10W / 20W / 30W

15°/20°/34°/60°

CRI: ≥90 / ≥95

2700K 3000K 4000K 5000K 5700K

100-120LM/W

4 wires / 6 wires

Standard/0-10V/Trica Dim/DALI /Tuya/
2.4G / CASAMBI

Warranty: 5 Years



DIMMABLE CCT

Zoom

10W / 20W / 30W

10°/15°/20°/25°/30°/35°/40°/45°/50°/55°/60°

CRI: ≥90 / ≥95

2700K 3000K 4000K 5000K 5700K

75-85LM/W

4 wires / 6 wires

Standard/0-10V/Trica Dim/DALI /Tuya/
2.4G / CASAMBI


Warranty: 5 Years



DIMMABLE CCT


10W

Unit:mm




20W

Unit:mm




30W

Unit:mm




10W

Unit:mm




20W

Unit:mm




30W

Unit:mm




10W

Unit:mm




20W

Unit:mm




30W

Unit:mm



HSD-XF Series

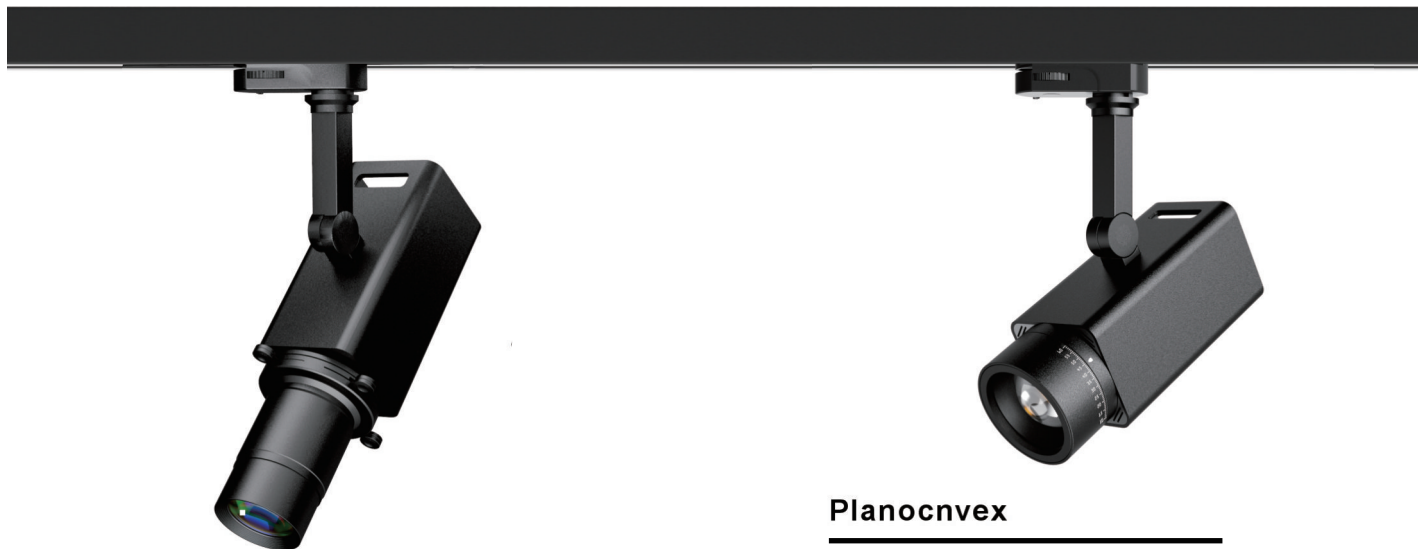

Shapeable

30W

34.5°/65°

CRI: ≥ 90 / ≥ 95

2700K 3000K 4000K 5000K 5700K

4 wires / 6 wires

Standard/O-10V/Trica Dim/Dali/Tuya/


2.4/CASAMBI

Warranty: 5 Yesrs



DIMMABLE CCT

30W Unit:mm

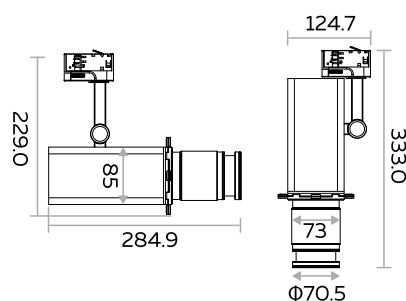

Planocnvex

10W / 20W / 30W

10-60°

CRI: ≥ 90 / ≥ 95

2700K 3000K 4000K 5000K 5700K

75-85LM/W

4 wires / 6 wires

Standard/O-10V/Trica Dim/Dali/Tuya/


2.4G / CASAMBI

Warranty: 5 Yesrs




DIMMABLE CCT


10W Unit:mm




20W Unit:mm



30W Unit:mm



HSD-T045 series



Accessories

Barndoor 	Honeycomb(colorful / lenssoftlens) 
Antiglare ring 	Wall washer ring 

HSD-T045 Series



HSD-T045-7W-Zoom


CRI	Flux	Optic
≥90 / ≥95	560LM	10°-60°

2700K 3000K 4000K 5000K 5700K

80-85 Lm/W

4 wires/6 wires

Warranty: 5 Years



HSD-T045-10W-Zoom


CRI	Flux	Optic
≥90 / ≥95	800LM	10°-60°

2700K 3000K 4000K 5000K 5700K

80-85 Lm/W

4 wires/6 wires

Warranty: 5 Years



HSD-T045-15W-Zoom


CRI	Flux	Optic
≥90 / ≥95	1200LM	10°-60°

2700K 3000K 4000K 5000K 5700K

80-85 Lm/W

4 wires/6 wires

Warranty: 5 Years



HSD-T045-30W-Zoom


CRI	Flux	Optic
≥90 / ≥95	2400LM	10°-60°

2700K 3000K 4000K 5000K 5700K

80-85 Lm/W

4 wires/6 wires

Warranty: 5 Years



HSD-T045-40W-Zoom


CRI	Flux	Optic
≥90 / ≥95	3200LM	10°-60°

2700K 3000K 4000K 5000K 5700K

80-85 Lm/W

4 wires/6 wires

Warranty: 5 Years



HSD-T085



90°
turning






350°
Rotated

Can install multiple accessories



T085

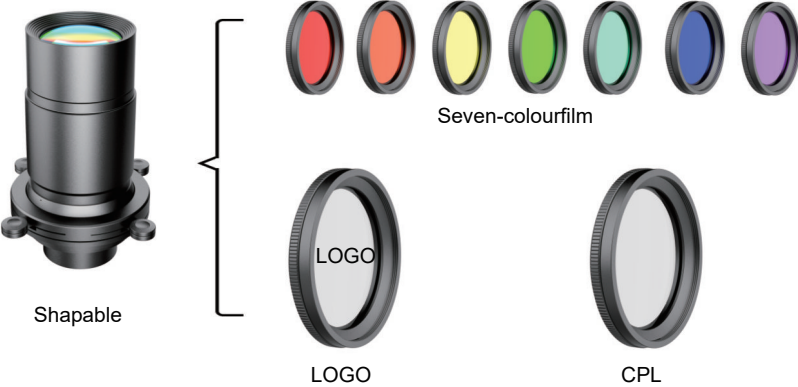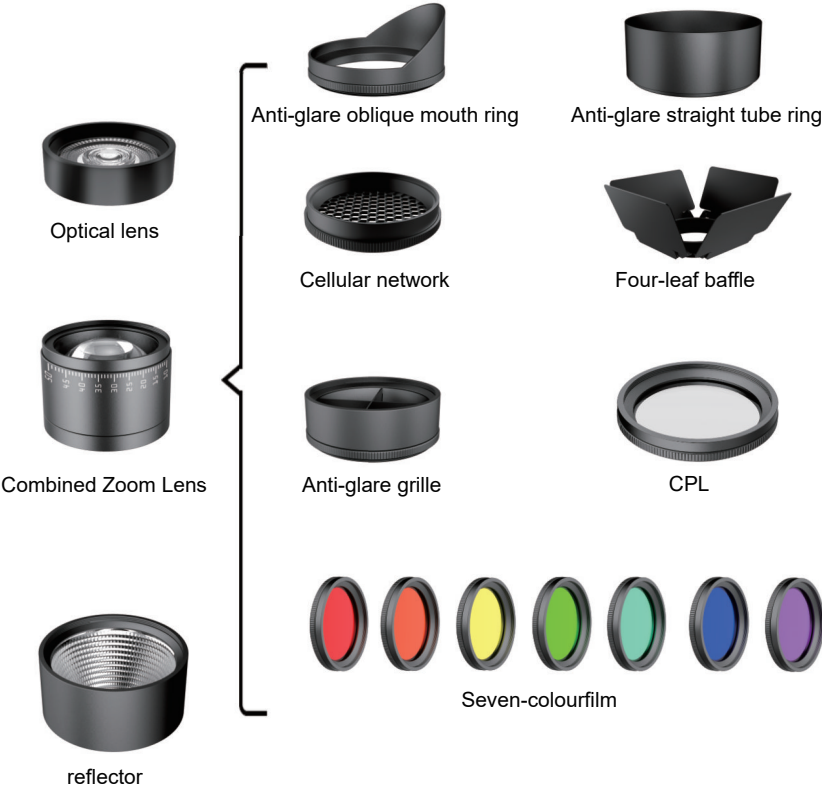

Can rotate 360 °



HSD-T085

Can accommodate multiple accessories




IP20




- Black
- White


zoom+anti-glare




zoom+grid




zoom+wallwasher



zoom+barndoor



zoom+honeycomb




HSD-T085-081





IP20




equipped with a shapable lens

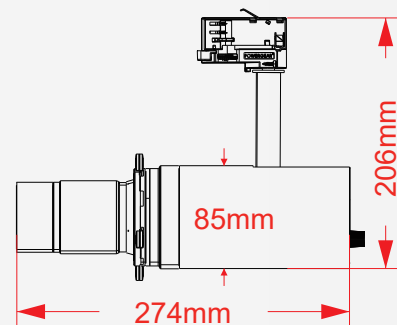


- Black
- White

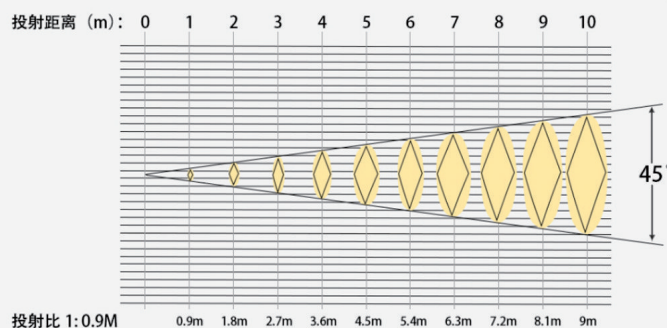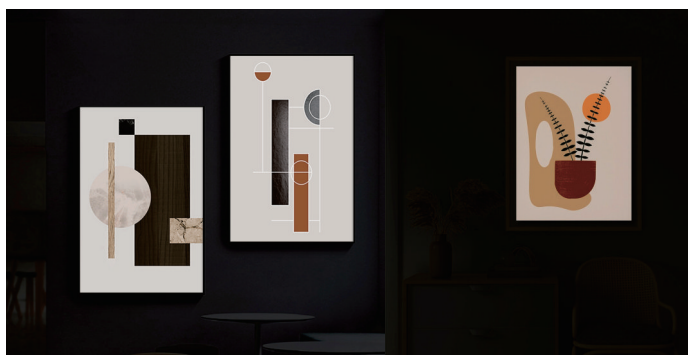

Picture 11

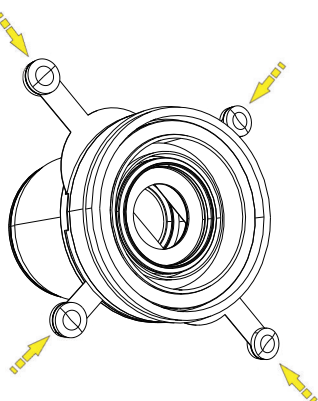

Adjust the gray part of Figure 1 , blade can change the lit area

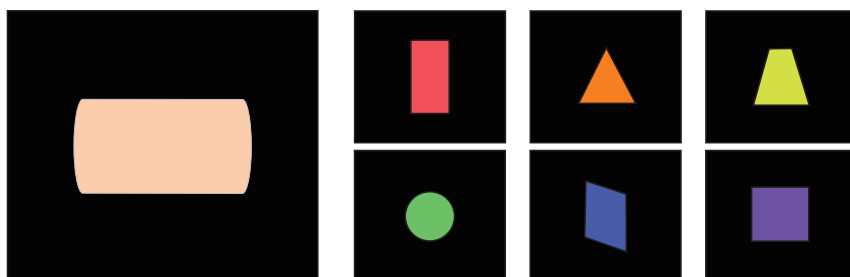

HSD-90T081

Special Track light for Museum and ArtGallery



HSD-90T081

0-10V Dimmable

W	CRI	Flux	Optic	Code
28W	≥90 / ≥95	1100LM	45°	HSD-90T081

30W



AC200-240V50/60Hz

2wires/3wires/4wires/6wires / Suction top





CCT Adjustable

0-10V Dimmable / DALI / TUYA / CASAMBI

Adapter on track or surface mounted

Warranty: 5Years

Accessories

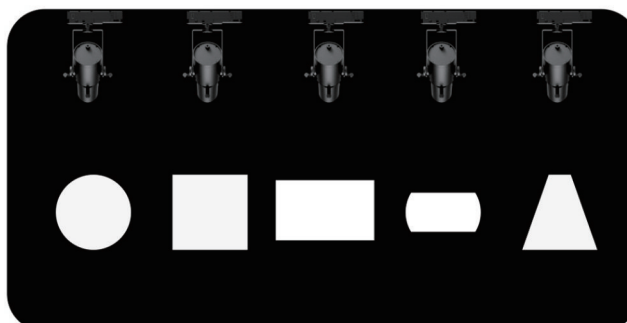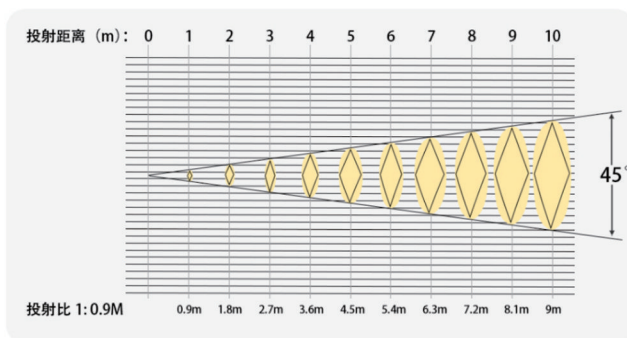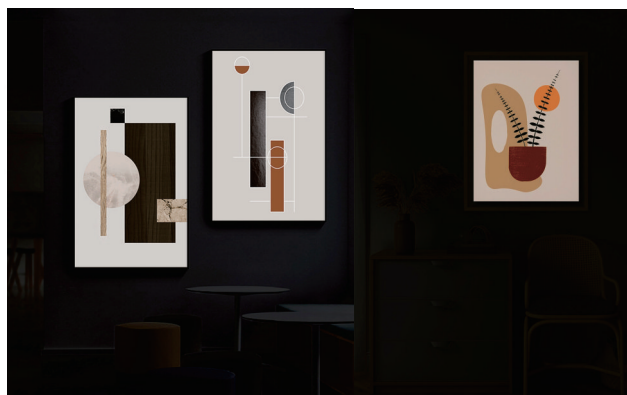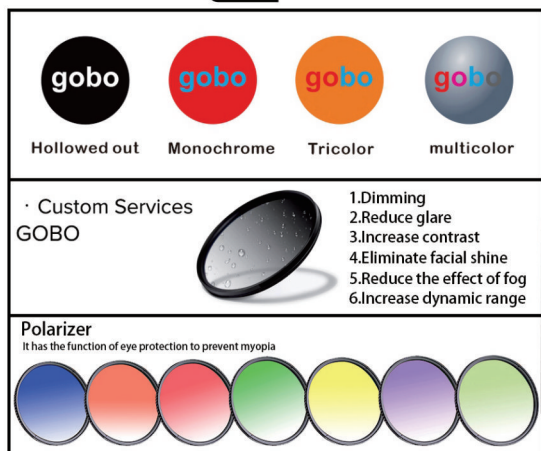

HSD-70T081

Special Track light for Museum and ArtGallery




Black

White



Dimensions(Unit:mm)

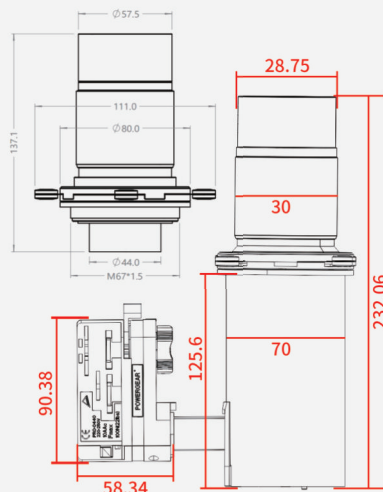

HSD-70T081

0-10V Dimmable

W	CRI	Flux	Optic	Code
15-20W	≥90 / ≥95	1200LM	45°	HSD-70T081

15-20W

2700K 3000K 4000K 5000K 5700K RGBW

AC200-240V50/60Hz

2wires/3wires/4wires/6wires / Suction top

CCT Adjustable

0-10V Dimmable / DALI / TUYA / CASAMBI

Adapter on track or surface mounted

Warranty: 5Years

Accessories






Hollowed out Monochrome Tricolor multicolor

Custom Services GOBO

- 1.Dimming
- 2.Reduce glare
- 3.Increase contrast
- 4.Eliminate facial shine
- 5.Reduce the effect of fog
- 6.Increase dynamic range

Polarizer

It has the function of eye protection to prevent myopia

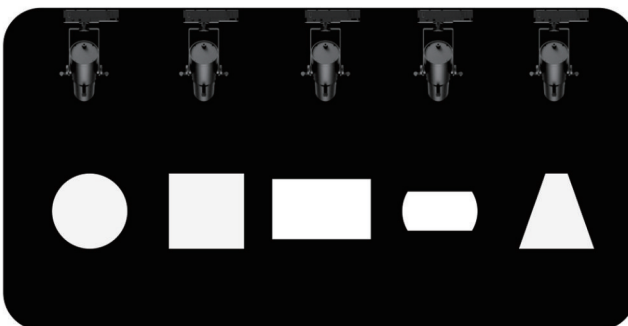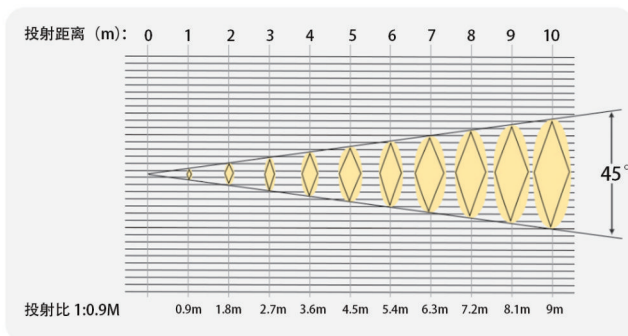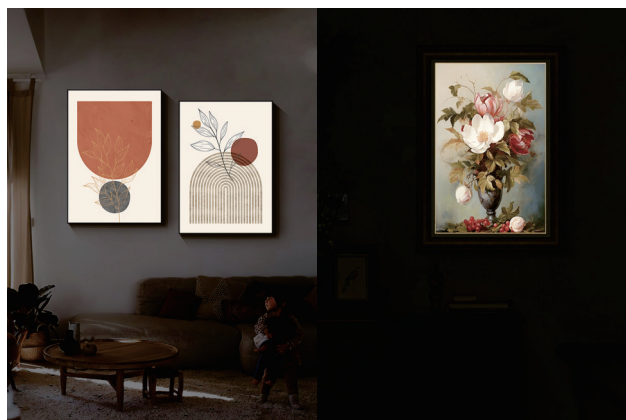

HSD-切光二代

Special Track light for Museum and ArtGallery




HSD-切光二代


Special Track light for Museum and ArtGallery



Dimensions(Unit:mm)

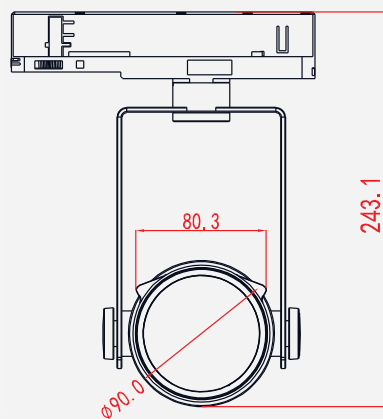

- ☒ Black
- ☐ White



HSD-切光二代

0-10V Dimmable

W	CRI	Flux	Optic	Code
30W	≥90 / ≥95	1200LM	20°-60°	HSD-切光二代


Microwave Sensor



Accessories

Items	Colour	Code
 GOBO		HSB-GOBO001
 Coloured filters		HSB-MEC001
 Custom Services		HSB-MEC000

Design color

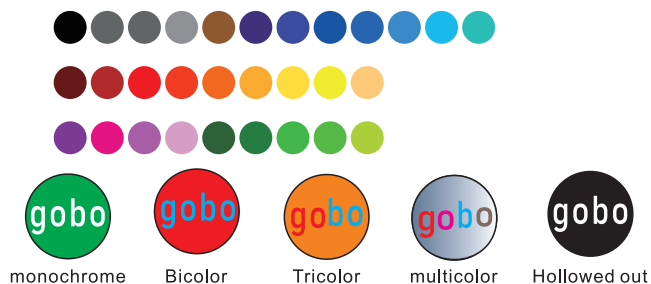

Lighting effect



HSD-MEC-3 Series

Special Track light for Museum and ArtGallery



Special track light for Museum and Art Gallery

- Dimming
- color adjustment
- stepless focusing

HSD-MEC-3 Series

Special Track light for Museum and ArtGallery




30W





AC200-240V50/60Hz
4 wires/6 wires
CCT Adjustable
0-10V Dimmable / DALI / TUYA / CASAMBI
Adapter on track or surface mounted
Warranty: 5Years

HSH-MEC-3

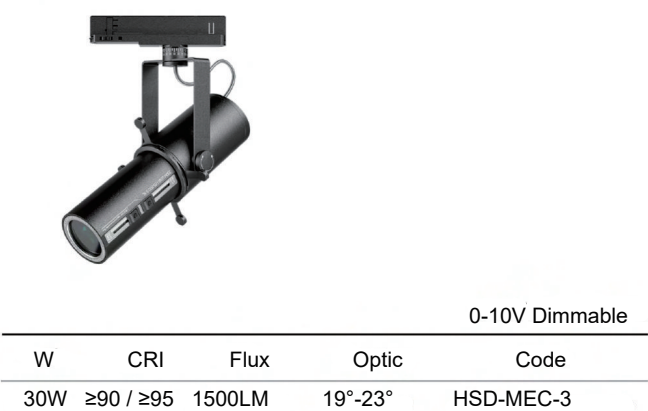

0-10V Dimmable				
W	CRI	Flux	Optic	Code
30W	≥90 / ≥95	1500LM	19°-23°	HSD-MEC-3

Accessories

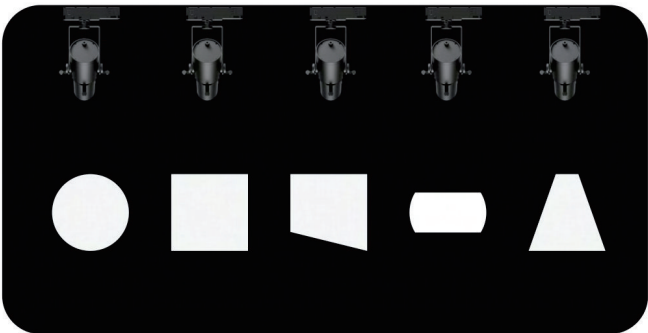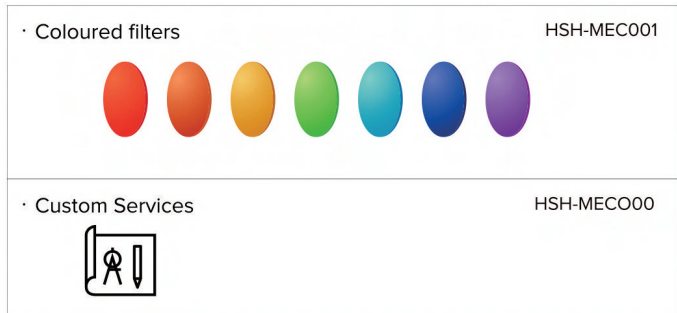

HSD-70Q50-2

Special Track light for Museum and ArtGallery




Black

White



Dimensions(Unit:mm)

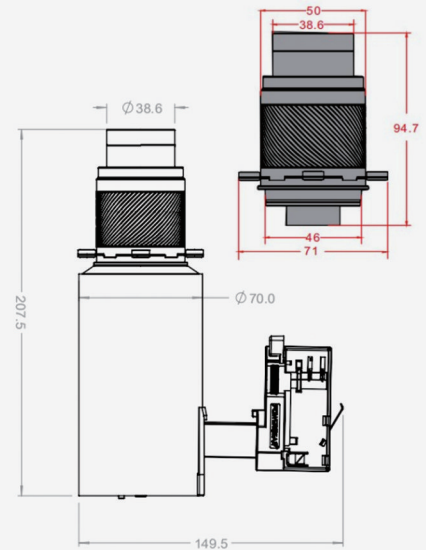

HSD-70Q50-2

0-10V Dimmable

W	CRI	Flux	Optic	Code
15-20W	≥90 / ≥95	500LM	40°	HSD-70Q50-2

15-20W

2700K 3000K 4000K 5000K 5700K RGBW

AC200-240V50/60Hz

2wires/3wires/4wires/6wires / Suction top





CCT Adjustable

0-10V Dimmable / DALI / TUYA / CASAMBI

Adapter on track or surface mounted


Warranty: 5Years

Accessories

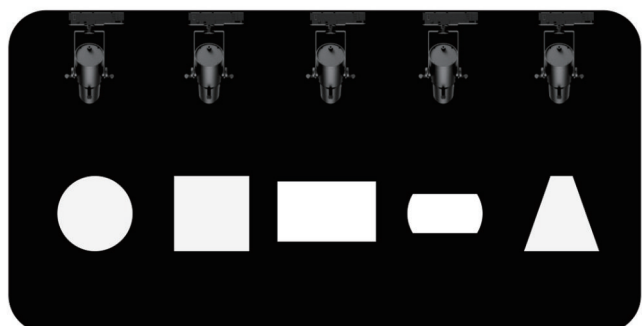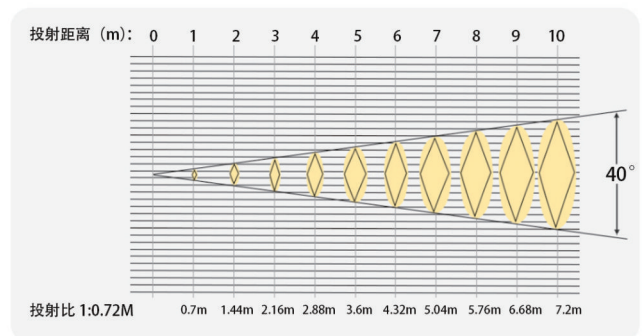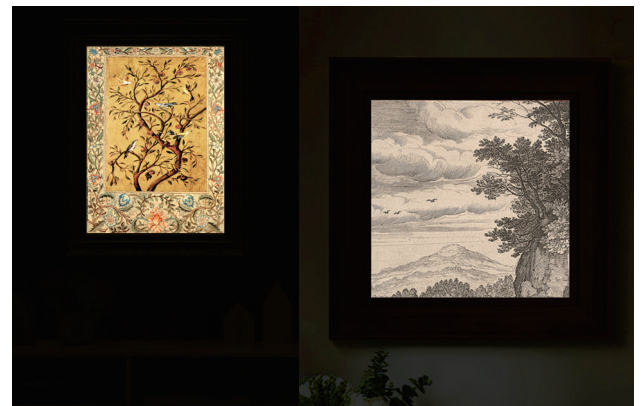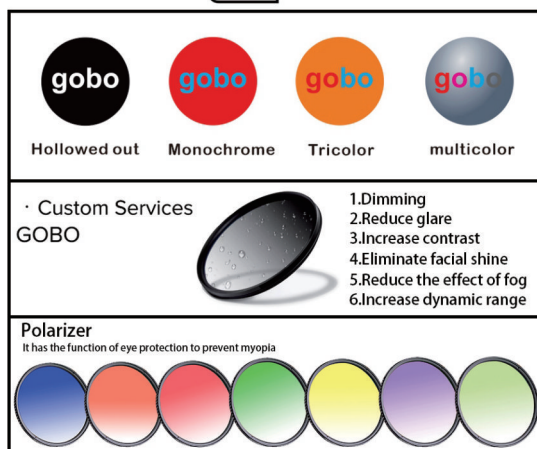


HSD-60G45

Special Track light for Museum and ArtGallery



Dimensions(Unit:mm)

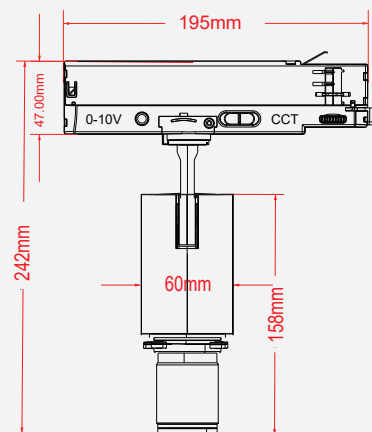

HSD-60G45

0-10V Dimmable

W	CRI	Flux	Optic	Code
12W	≥90 / ≥95	500LM	45°	HSD-60G45

12W



AC200-240V50/60Hz

2wires/3wires/4wires/6wires / Suction top Magnets

CCT Adjustable

0-10V Dimmable / DALI / TUYA / CASAMBI

Adapter on track or surface mounted

Warranty: 5Years

Accessories



Hollowed out

Monochrome

Tricolor

multicolor




Custom Services

GOBO

- 1.Dimming
- 2.Reduce glare
- 3.Increase contrast
- 4.Eliminate facial shine
- 5.Reduce the effect of fog
- 6.Increase dynamic range

Polarizer

It has the function of eye protection to prevent myopia

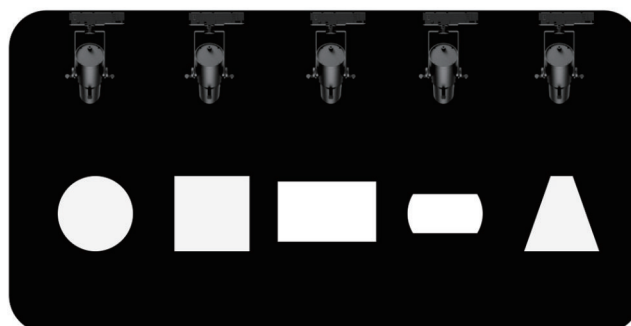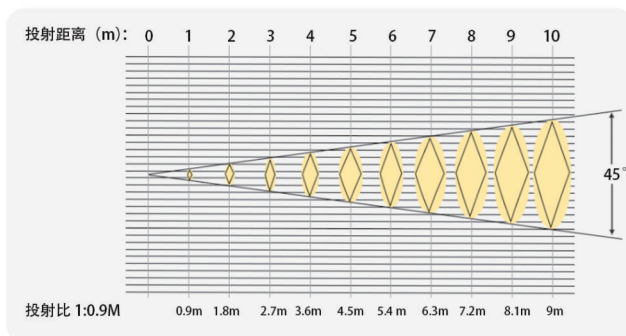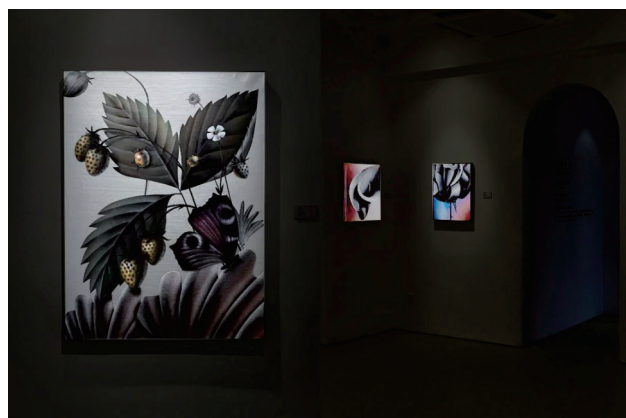

HSD-50G45

Special Track light for Museum and ArtGallery




Black

White



Dimensions(Unit:mm)

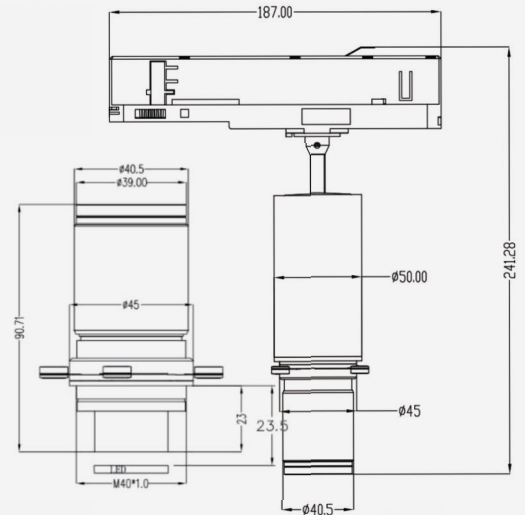

HSD-50G45

0-10V Dimmable

W	CRI	Flux	Optic	Code
12W	≥90 / ≥95	600LM	45°	HSD-50G45

12W

2700K 3000K 4000K 5000K 5700K RGBW

AC200-240V50/60Hz

2wires/3wires/4wires/6wires / Suction top Magnets





CCT Adjustable

0-10V Dimmable / DALI / TUYA / CASAMBI

Adapter on track or surface mounted

Warranty: 5Years

Accessories

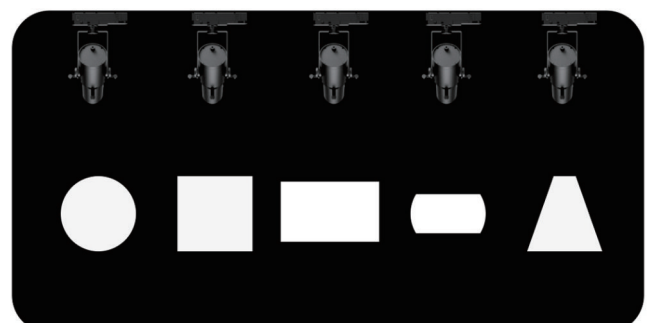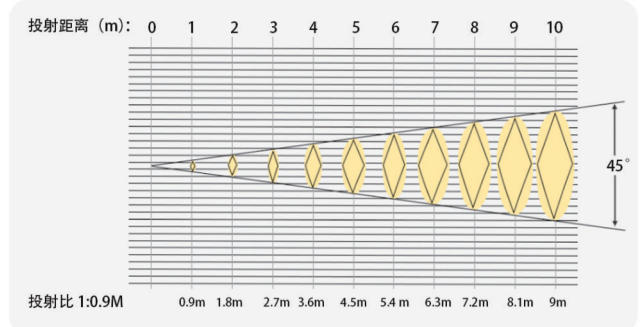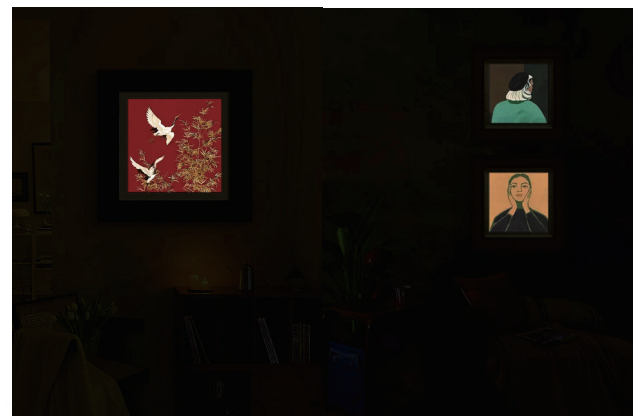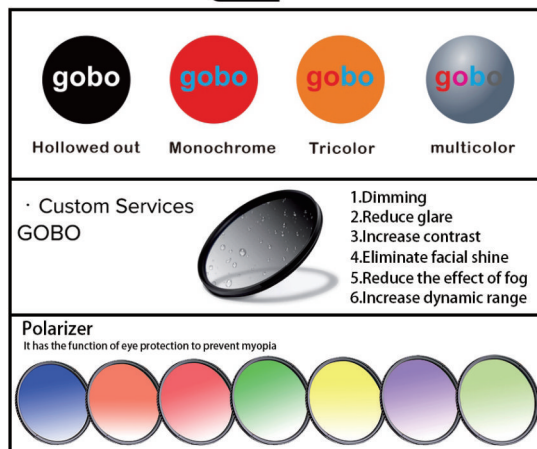

HSD-XB Series



HSD-Q50-2
40°

HSD-XB Series




- Black
- White


HSD-XB-Q50-2-10W

- 2700K
- 3000K
- 4000K
- 5000K
- 5700K

AC200-240V 50/60Hz
 Φ 75-80mm
 DALI / TRIAC / 2.4G
 CITIZEN / CREEIOSRAM
 TRIDONIC / OSRAM / PHILIPS
 Built-in installation
Warranty: 5 Years



W	CRI	Flux	Optic	Code
10W	≥90	70LM/W	24°/35°Zoomable	XB-Q50-2-10W

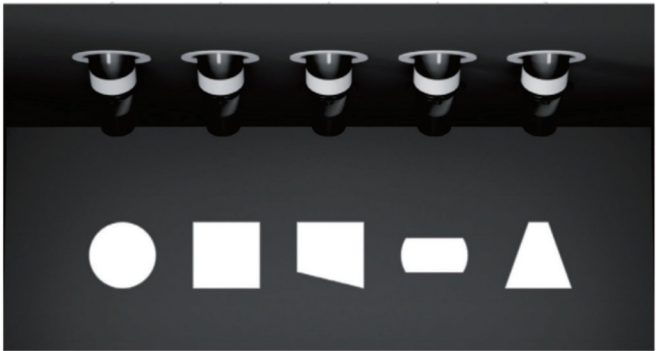

40°

HSD-Q50-2
 40°

HSD-90T082


Special Track light for Museum and ArtGallery



- Black
- White



Dimensions(Unit:mm)

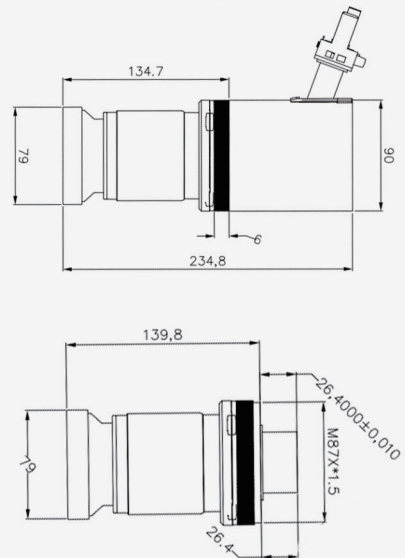

HSD-90T082

0-10V Dimmable

W	CRI	Flux	Optic	Code
30W	≥90 / ≥95	750LM	70°	HSD-90T082

30W



AC200-240V50/60Hz

2wires/3wires/4wires/6wires / Suction top

CCT Adjustable

0-10V Dimmable / DALI / TUYA / CASAMBI

Adapter on track or surface mounted

Warranty: 5Years

Accessories



Hollowed out

Monochrome

Tricolor




multicolor

Custom Services GOGO


- 1.Dimming
- 2.Reduce glare
- 3.Increase contrast
- 4.Eliminate facial shine
- 5.Reduce the effect of fog
- 6.Increase dynamic range

Polarizer

It has the function of eye protection to prevent myopia

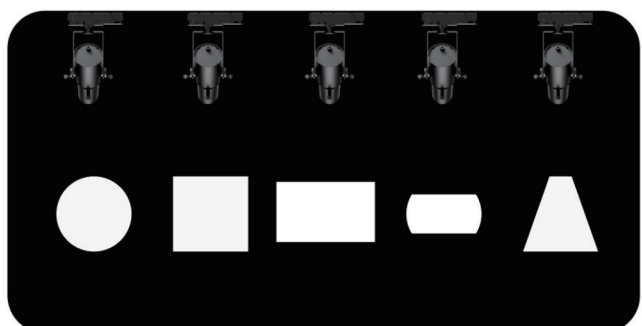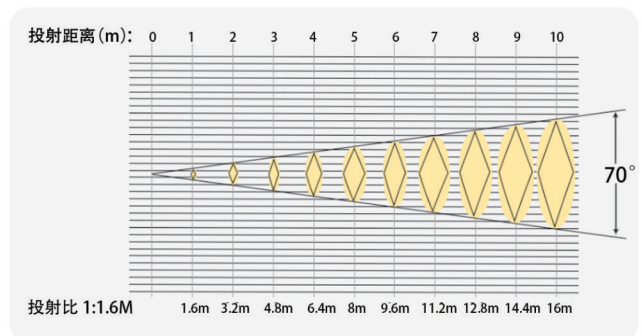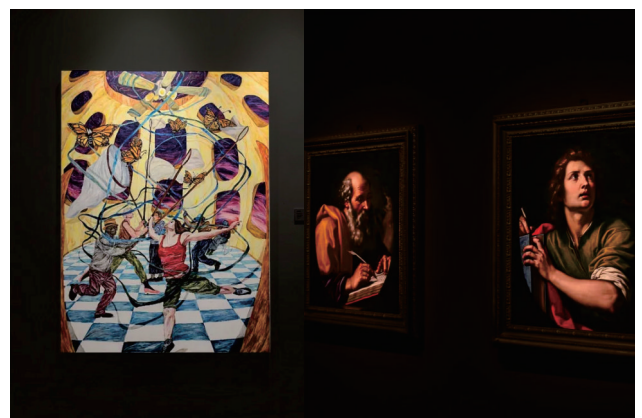

HSD-CF7595

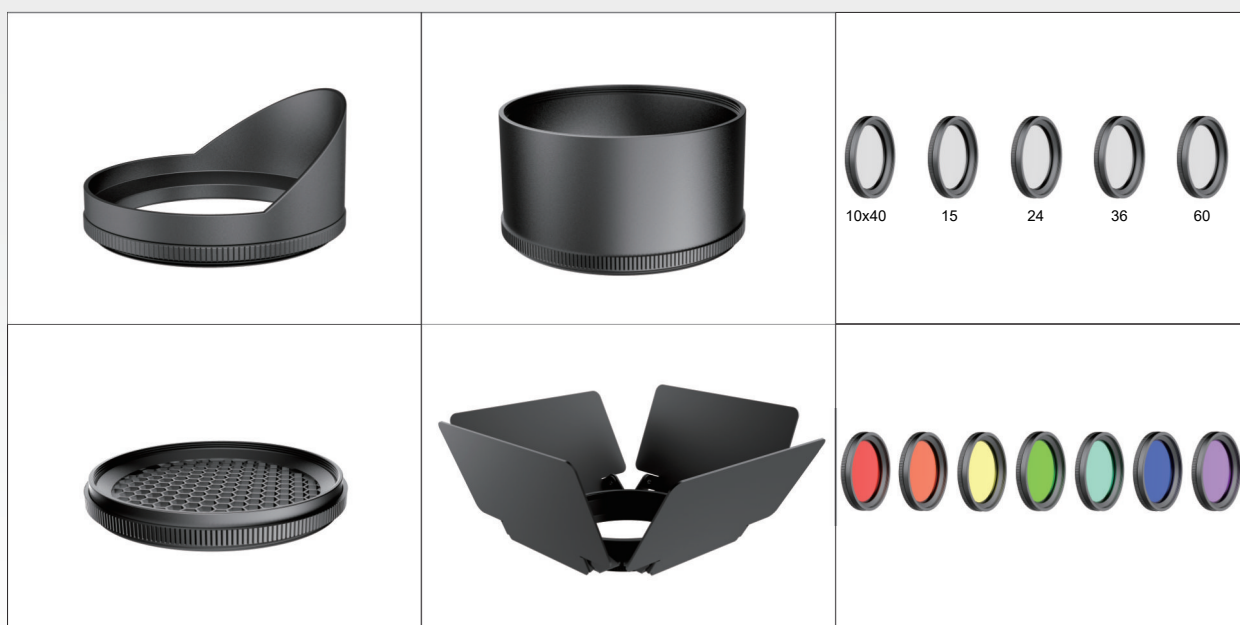

HSD-CF7595



- Black
- White

Technical Date


CRI	Flux	Optic	Code
≥90 / ≥97	75-89 LM/W	8°	HSD-CF7595

30W

- 2700K
- 3000K
- 4000K
- 5000K
- 5700K


AC200-240V50/60Hz
AAG / Eutrac 4 wires/6 wires
2.4G RF
CITIZEN / CREE / OSRAM
2.4G Control
Adapter on track Surface mounted
Warranty: 5 Years

Application Scenario

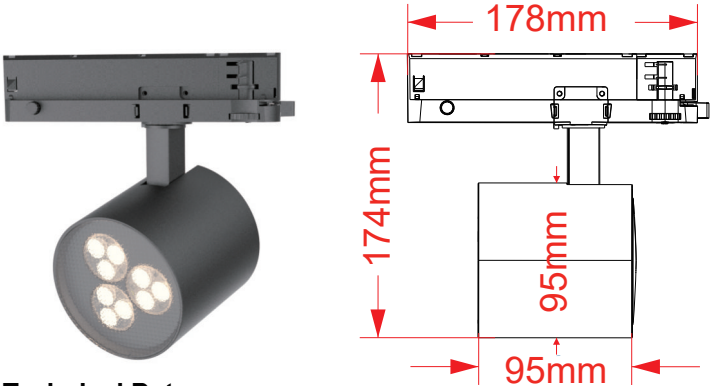

Technical Date

CRI	Flux	Optic	Code
≥90 / ≥97	75-89 LM/W	8°	HSD-CF7595

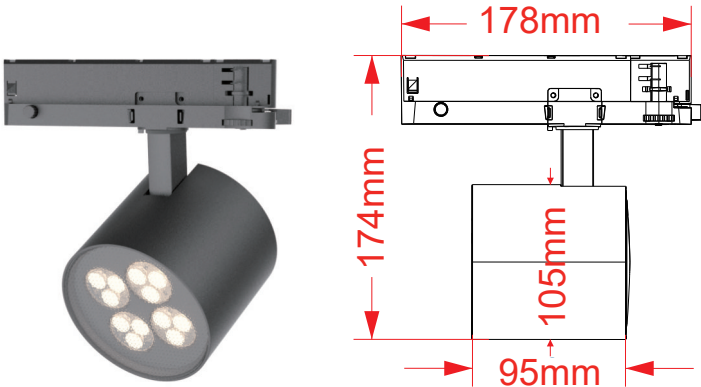


Technical Date

CRI	Flux	Optic	Code
≥90 / ≥97	75-89 LM/W	8°	HSD-CF85105

HSD-CF7595




- Black
- White

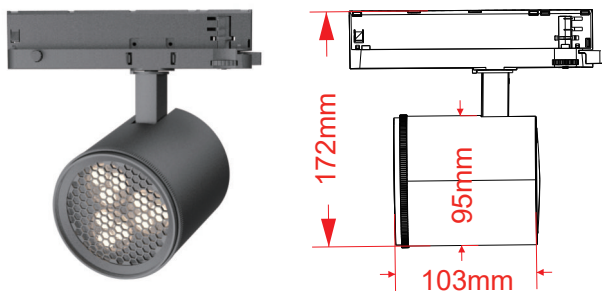


Technical Date

CRI	Flux	Optic	Code
≥90 / ≥97	75-89 LM/W	8°	HSD-CF7595

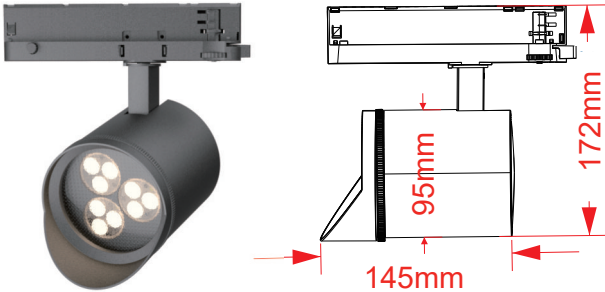


Technical Date

CRI	Flux	Optic	Code
≥90 / ≥97	75-89 LM/W	8°	HSD-CF7595

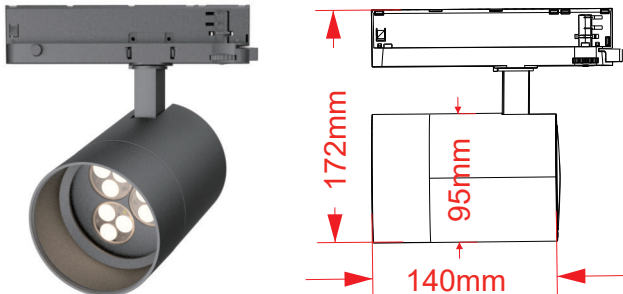

Technical Date


CRI	Flux	Optic	Code
≥90 / ≥97	75-89 LM/W	8°	HSD-CF7595

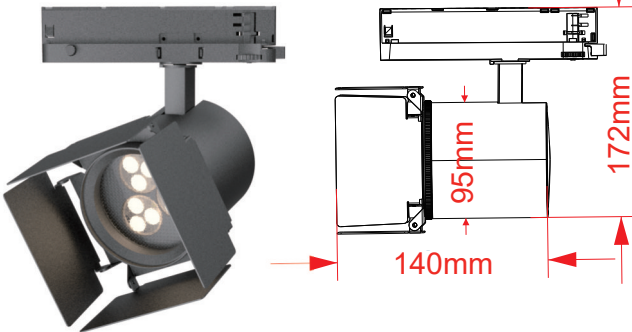

Technical Date

CRI	Flux	Optic	Code
≥90 / ≥97	75-89 LM/W	8°	HSD-CF7595

Product parameters

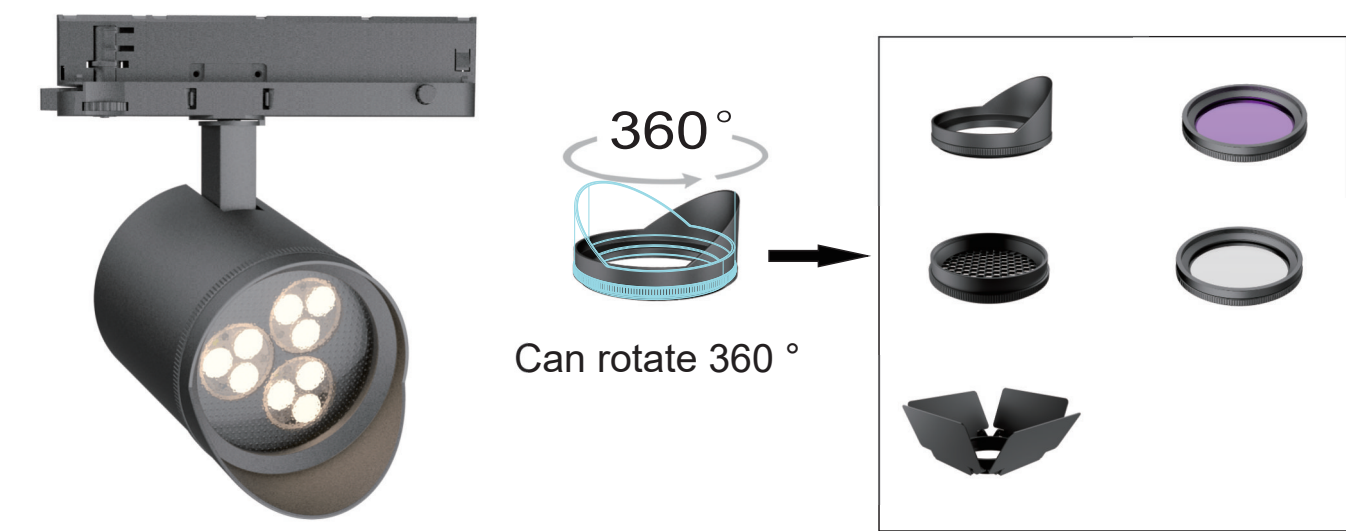

picture	model	angle	Color temperature	Luminous efficacy	power
	Inclinedcylinder				
	Cellular network				
	Straightcylinder				
	Four-leafplate				
	Grid				
	Polarizer				
	Seven-colourfilm				

HSD-T080




90°
turning



350°
Rotated

HSD-T080



Track Adapter Version

30W



HSD-T080 Non Dimmable

CRI	Flux	Optic	Code
≥90 / ≥95	2400 LM	15°/24°/38°/50°/50x50°/35x75°	HSD-T08001

HSD-T080 0-10V Dimmable

CRI	Flux	Optic	Code
≥90 / ≥95	2400 LM	15°/24°/38°/50°/50x50°/35x75°	HSD-T08011

Technical Data

CRI	Flux	Optic	Code
≥90 / ≥95	80-85 LM/W	15°/24°/38°/50°/50x50°/35x75°	HSD-T080

30W

2700K 3000K 4000K 5000K 5700K

AC200-240V50/60Hz

4 wires/6 wires

0-10V / Standard/Trica Dim/ DALI / Tuya/ CASAMBI




CREE / OSRAM

OSRAM / PHILIPS / RXPOWER


Adapter on track / surface mounted

Warranty: 5 Years

Dimensions(Unit:mm)

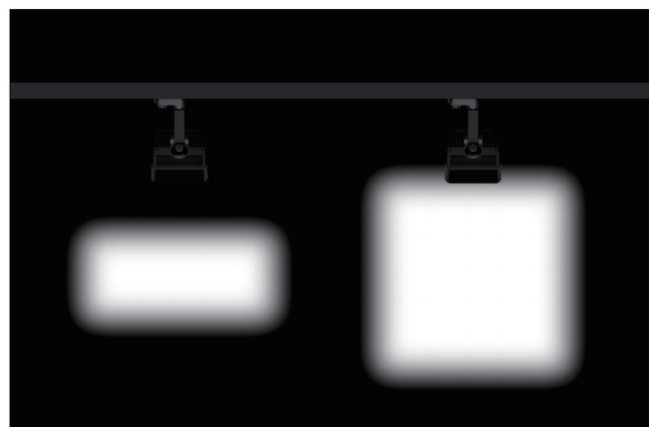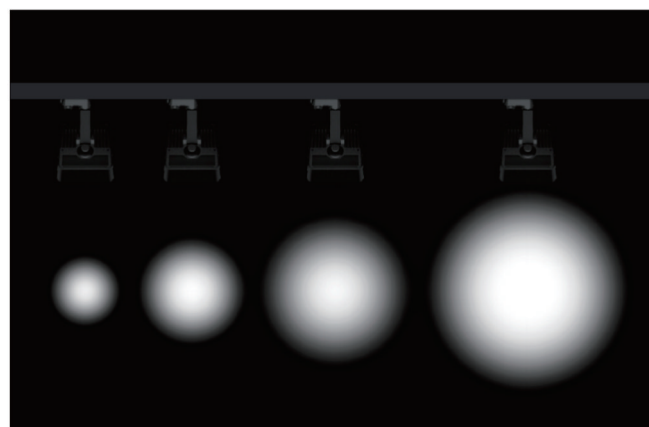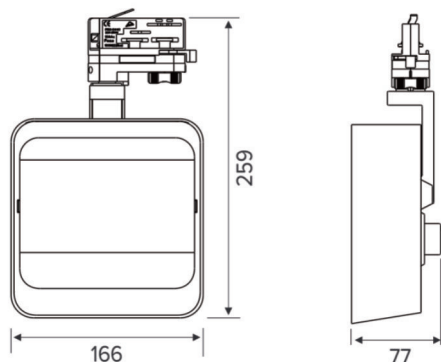

HSD-S40




Main body material





Titanium alloy lamp body, surface oxidation, extinction black

Direction of projection




Horizontal adjustment in any direction; vertical-20 ~ 20 °

Assembly dimensions

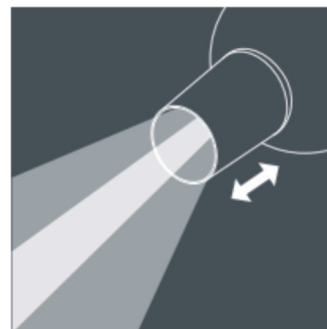
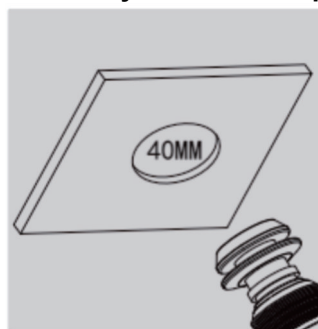


A circular hole with a diameter of 40mm is required in the mounting lamp tube shoot collocation achieves the more reasonable application


Hole size:	40MM
Installation thickness:	1~7MM
Type of light source:	High-Power LED 3W
Light source power:	>50000h-L70 / B10-Ta25°C (LM-80/TM-
Light source life:	21) 3000K / 4000K, >Ra90
Color temperature/indication:	3 SDC M
Color tolerance of light source:	
Input Voltage:	2V-21V DC(Constant current drive 700mA Max)
Dimming control:	0-10 V special electrical appliances
Product weight:	About 0.17 kg, not including packaging
Light angle:	4°~15° illumination parameter
Lumen value:	27 lm ~ 34 lm



Museum lighting applications

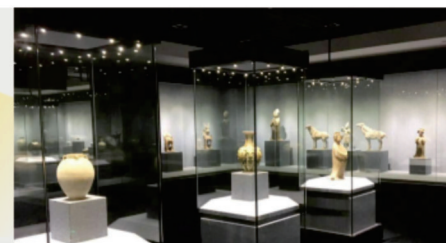



Museum of art lighting applications

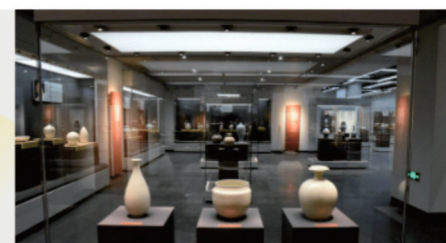


Museum lighting applications




LUMINOUS INTENSITY
DI STRIBUTION DIAGRAM

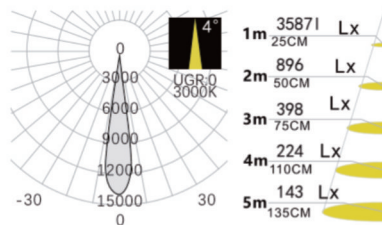

LUMINOUS INTENSITY
DI STRIBUTION DIAGRAM



15 ° illumination parameter

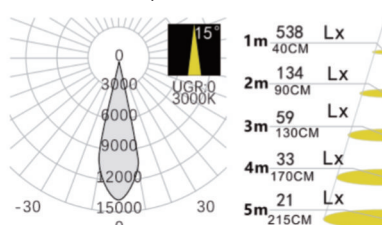

HSD-Door type lamp series

HSD-DM16Y





Product list		
HSD-DM series		
Models Power	HSD-DM	HSD-DM
Input Voltage	16W / M 220-240V	16W / M 220-240V
CCT / Color temperature	3000K 4000K 5000K 6000K	3000K 4000K 5000K 6000K
CRI / Show	≥90 120° 50000Hours IP20	≥90 120° 50000Hours IP20
Beam angle		
Service life		
IP / Protection level		

HSD-DM16R




HSD-EM16PG

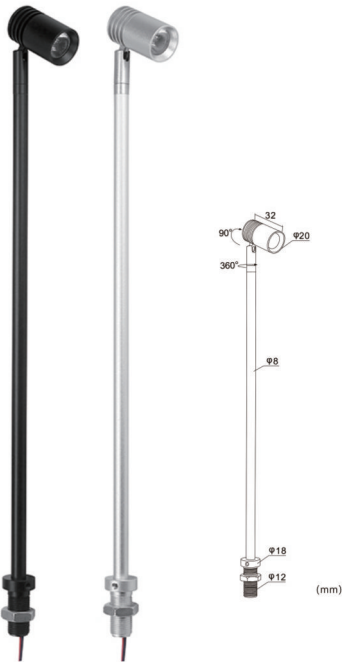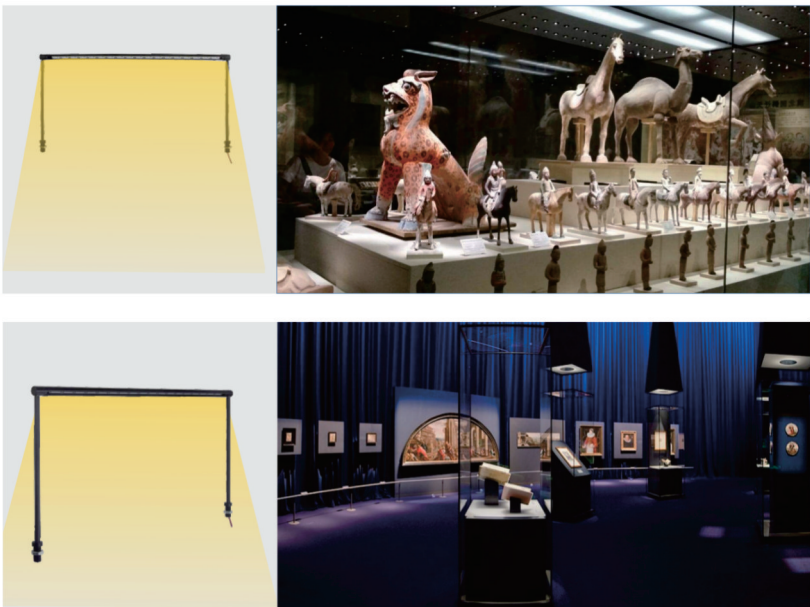



Product list	
HSD-EM series	
Models Power	HSD-EM16PG 1-3W 220-
Input Voltage	240V
CCT / Color temperature	3000K 4000K 5000K 6000K
CRI / Show	≥90
Beam angle	10°/ 25°/ 45°/ 60°
Service life	50000Hours 20
IP / Protection level	

OPTICAL LENS SERIES

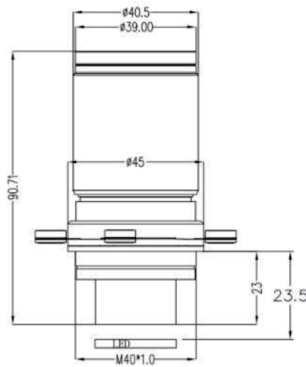



HSD-G45

Model	Angle	Projection ratio	Adapts lamp body
G45	45°	1: 0.9m	70/80/90

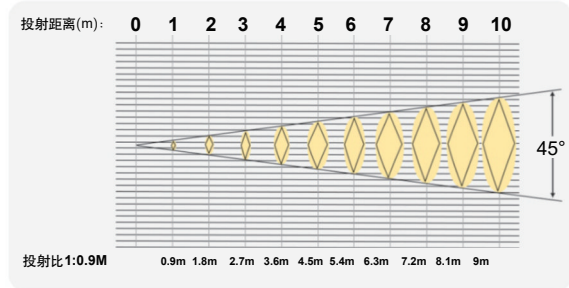



HSD-Q50-2

Model	Angle	Projection ratio	Adapts lamp body
Q50-2	40°	1: 72m	50/60/70

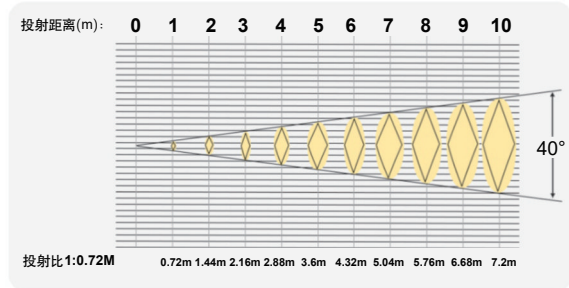


HSD-70T081

Model	Angle	Projection ratio	Adapts lamp body
T081	45°	1: 0.9m	70/80/90

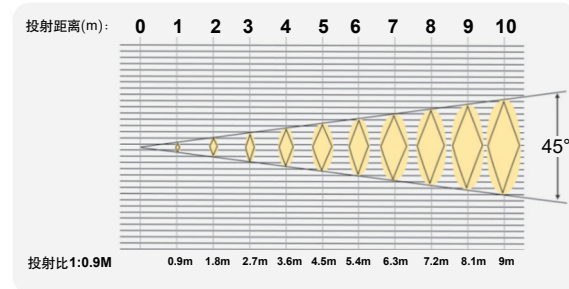


HSD-90T081

Model	Angle	Projection ratio	Adapts lamp body
T081	45°	1: 0.6m	70/80/90


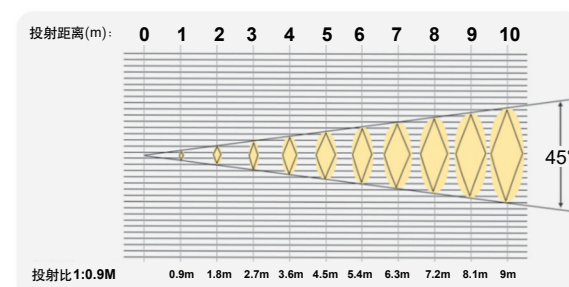


OPTICAL LENS SERIES

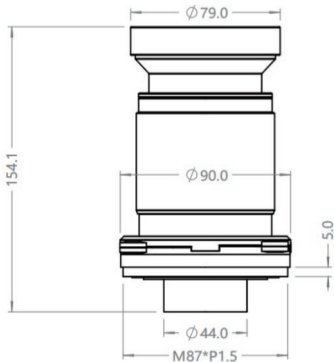



HSD-T082

Model	Angle	Projection ratio	Adapts lamp body
T082	70°	1: 1.6m	80/90

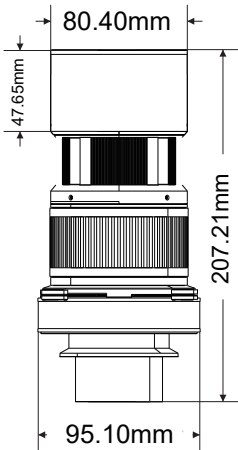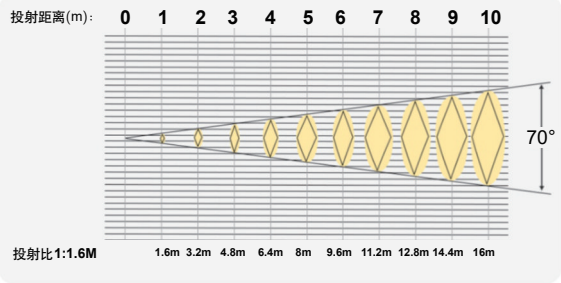

HSD-切光二代

Model	Angle	Projection ratio	Adapts lamp body
切光二代	45°	1: 0.42m	80

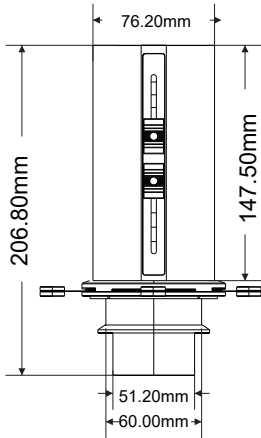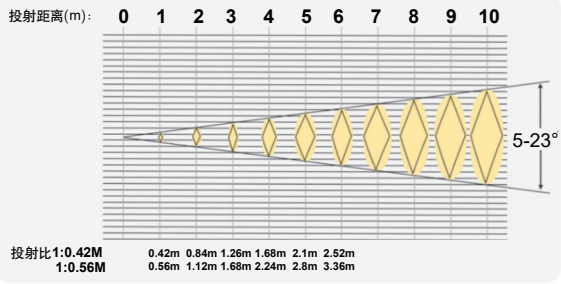

HSD-切光三代

Model	Angle	Projection ratio	Adapts lamp body
切光三代	70°	1: 0.6m	80

